




OVER 1 MILLION SOLD!



CONVENTIONAL LATHE



HEAVY DUTY SERIES

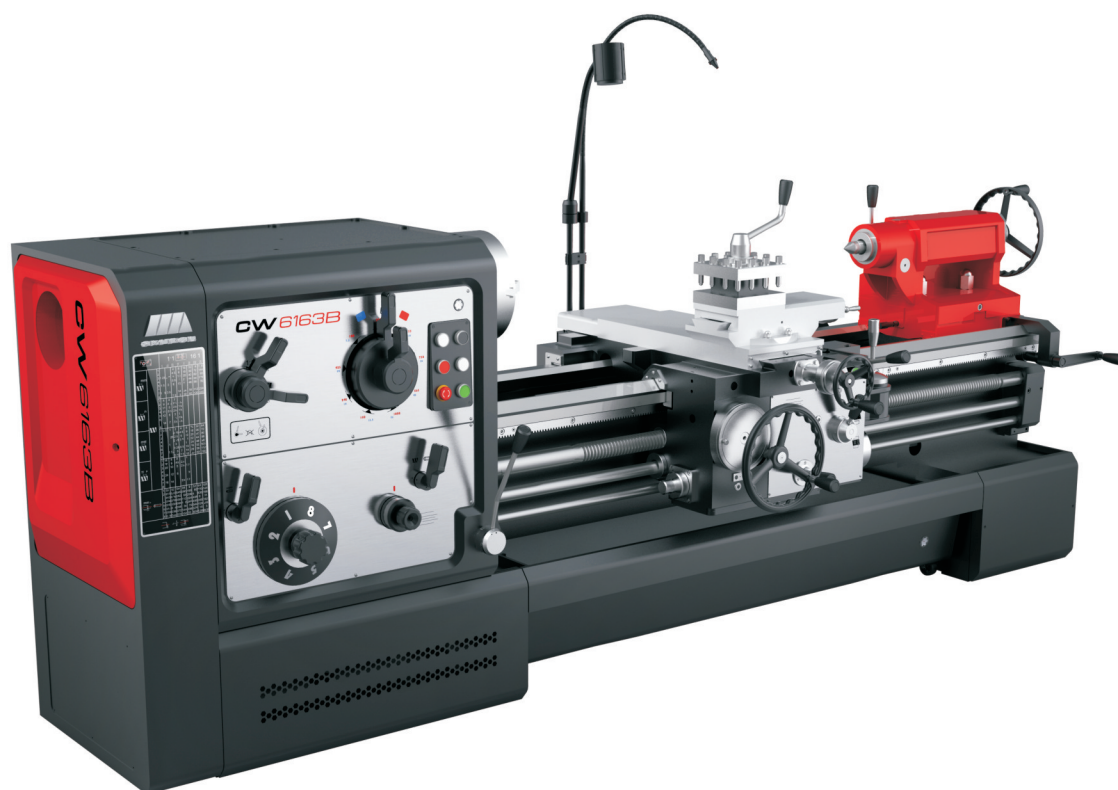

HIGH RIGIDITY | HIGH EFFICIENCY | POWERFUL

SHENYANG MACHINE TOOL CO., LTD.

SPECIFICATIONS

Item	Unit	CW6163B/C	CW6180B/C	CW61110B/C	CW61125B
		CW6263B/C	CW6280B/C	CW62110B/C	
Capacities					
Max Swing Dia. over Bed	mm	630	800	1100	1250
Max Swing Dia. over Carriage	mm	350	480	800	865
Max Swing Dia. and Width in Gap	mm	- 800/300	- 1000/310	- 1300/310	-
Spindle					
Spindle Bore and Nose	-	104, D11 (B series) 130, D11 (C series)			130, A215
Steps and Range of Spindle Speeds	r/min	18 speeds 7.5-1000 (B series) 18 speeds 8.5-800 (C series)	18 speeds 5.4-720	18 speeds 4.8-640	21 kinds 3.15-315/ 2-200(Forward) 12 kinds 3.5-278/ 2.24-178(Reverse)
Scope of Threads					
Number, Range of Metric Thread	mm	50kinds 1-240(There are additional 14 kinds non-standard threads)			44 kinds 1-120
Number, Range of Whitworth Thread	tpi	26 kinds 14-1			31 kinds 24-1/4
Number, Range of Module Thread	mm	53 kinds 0.5-120			45 kinds 0.5-60
Number, Range of Diametral Thread	DP	24 kinds 28-1			38 kinds 1/2-56
Tailstock					
Max Travel of Tailstock Quill	mm	250			300
Taper of Tailstock Quill	-	Morse No.5			Morse No.6
General					
Main Motor Power	kW	11	11/15	11/15	22
Max Weight of Workpiece	kg	2500			5000
Net Weight of Machine(kg)	mm	4700(3000mm) 5800(4000mm)	5500(3000mm) 6100(4000mm)	6100(3000mm) 6700(4000mm) 7500(5000mm)	11900(3000mm) 14500(5000mm)

SHENYANG MACHINE TOOL CO., LTD.

Add: No.1, 17-A, Kaifa Avenue, Shenyang Economic & Technological Development Zone, Shenyang, China
 Postcode: 110141
 Tel: +86-24-25191721, 25191722
 Fax: +86-24-25191551
 E-mail: iec@smtcl.com
<http://www.smtcl.com>

Note : - Specifications are subject to change without further notice.
 - Image is the representation of the machine, not necessarily a photograph.

